


3 × 4 keypad

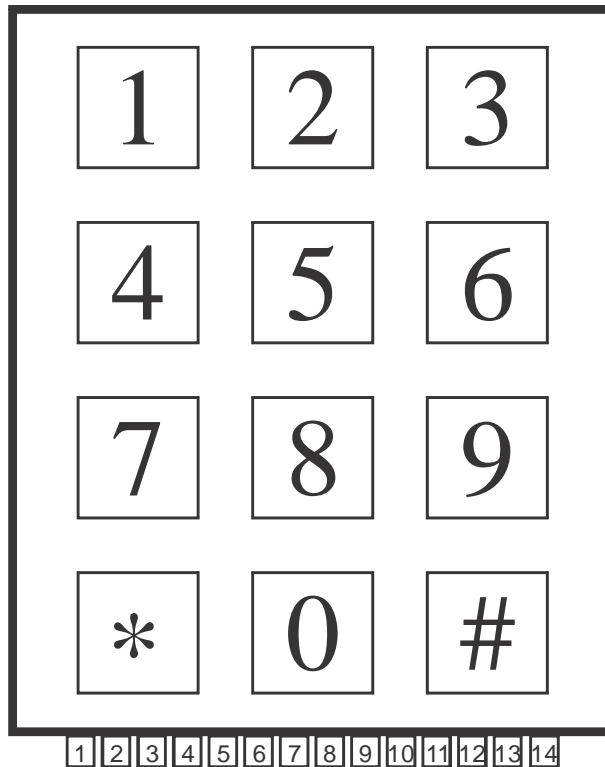

Keypad pinouts

Output Pin #	connection	Output Pin #	Pin connection
1	Com	8	8 button
2	not used	9	5 button
3	* button	10	2 button
4	7 button	11	# button
5	4 button	12	9 button
6	1 button	13	6 button
7	0 button	14	3 button

Notes:

1. Typically, the “Com” or common pin is connected to ground. However, it could be connected to 5 V or 3.3 V if desired.
2. Keypad buttons are normally open/high impedance/no connection. When a button is pressed, a connection/contact is made between the output pin associated with that button and output pin 1/“Com”. For example, pushing the “2” button on the keypad connects output pin 1/com and output pin 10.