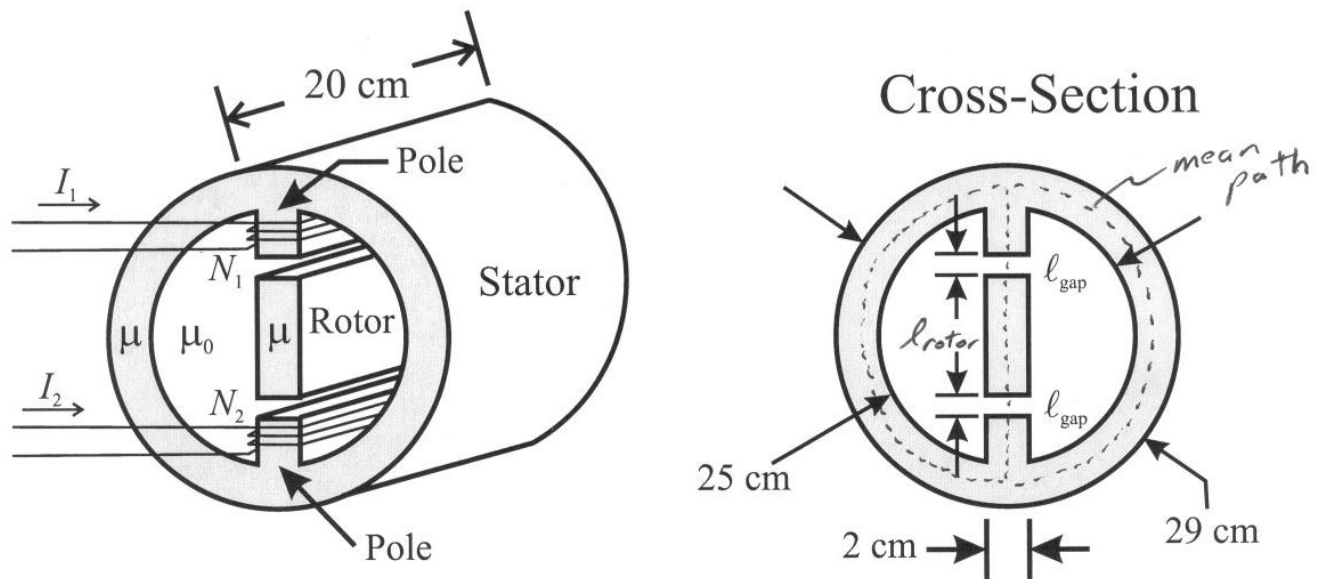


ex. Motor Magnetic Circuit

Given: $\mu = 5000\mu_0$ for rotor & stator

$$l_{\text{gap}} = 2\text{ mm}$$

$$l_{\text{rotor}} = 21\text{ cm}$$

Assume: $I_1 = I_2 = I$ and $N_1 = N_2 = N$

→ Typical for motors to be "balanced"

Calculate the mmf(s) required to achieve

$\Phi_{\text{rotor}} = 5 \times 10^{-3}\text{ Wb} = 5\text{ mWb}$. Then, select I

and N given the requirement that the

current $I \leq 80\%$ of $15\text{ A} = 12\text{ A}$

ex. cont.

Calculate reluctances for equivalent Magnetic circuit

$$\mathcal{R}_{\text{rotor}} = \frac{l_{\text{rotor}}}{\mu S_{\text{rotor}}} = \frac{21 \times 10^{-2}}{5000 \mu_0 (2 \times 10^{-2})(20 \times 10^{-2})}$$

$$\mathcal{R}_{\text{rotor}} = 8355.6345 \text{ A}\cdot\text{t/Wb}$$

$$\mathcal{R}_{\text{gap}} = \frac{l_{\text{gap}}}{\mu_0 S_{\text{gap}}} = \frac{2 \times 10^{-3}}{(4\pi \times 10^{-7})[(2 \times 10^{-2} + 2 \times 10^{-3})(20 \times 10^{-2} + 2 \times 10^{-3})]}$$

$$\mathcal{R}_{\text{gap}} = 358,134.4354 \text{ A}\cdot\text{t/Wb}$$

$$\mathcal{R}_{\text{pole}} = \frac{l_{\text{pole}}}{\mu S_{\text{pole}}} = \left[\frac{\left(\frac{(29 \times 10^{-2} + 25 \times 10^{-2})}{2} \right) - 21 \times 10^{-2} - 2(2 \times 10^{-3})}{2} \right] \frac{1}{5000(4\pi \times 10^{-7})(2 \times 10^{-2})(20 \times 10^{-2})}$$

27×10^{-2} ← mean diameter
 25×10^{-2} ← rotor diameter
 2×10^{-3} ← gap

$$\mathcal{R}_{\text{pole}} = \frac{0.028}{2.5133 \times 10^{-5}} = 1114.0846 \text{ A}\cdot\text{t/Wb}$$


$$\mathcal{R}_{\text{stator}} = \frac{\left(\frac{\text{mean Circumference}}{2} \right)}{\mu S_{\text{stator}}} = \frac{\frac{\pi (27 \times 10^{-2})}{2}}{5000(4\pi \times 10^{-7})\left(\frac{29 \times 10^{-2} - 25 \times 10^{-2}}{2} \right)(20 \times 10^{-2})}$$

↑
each half of stator


$$= \frac{0.424115}{2.5133 \times 10^{-5}}$$

$$\mathcal{R}_{\text{stator}} = 16,875 \text{ A}\cdot\text{t/Wb}$$


ex. cont. Equivalent Magnetic Circuit

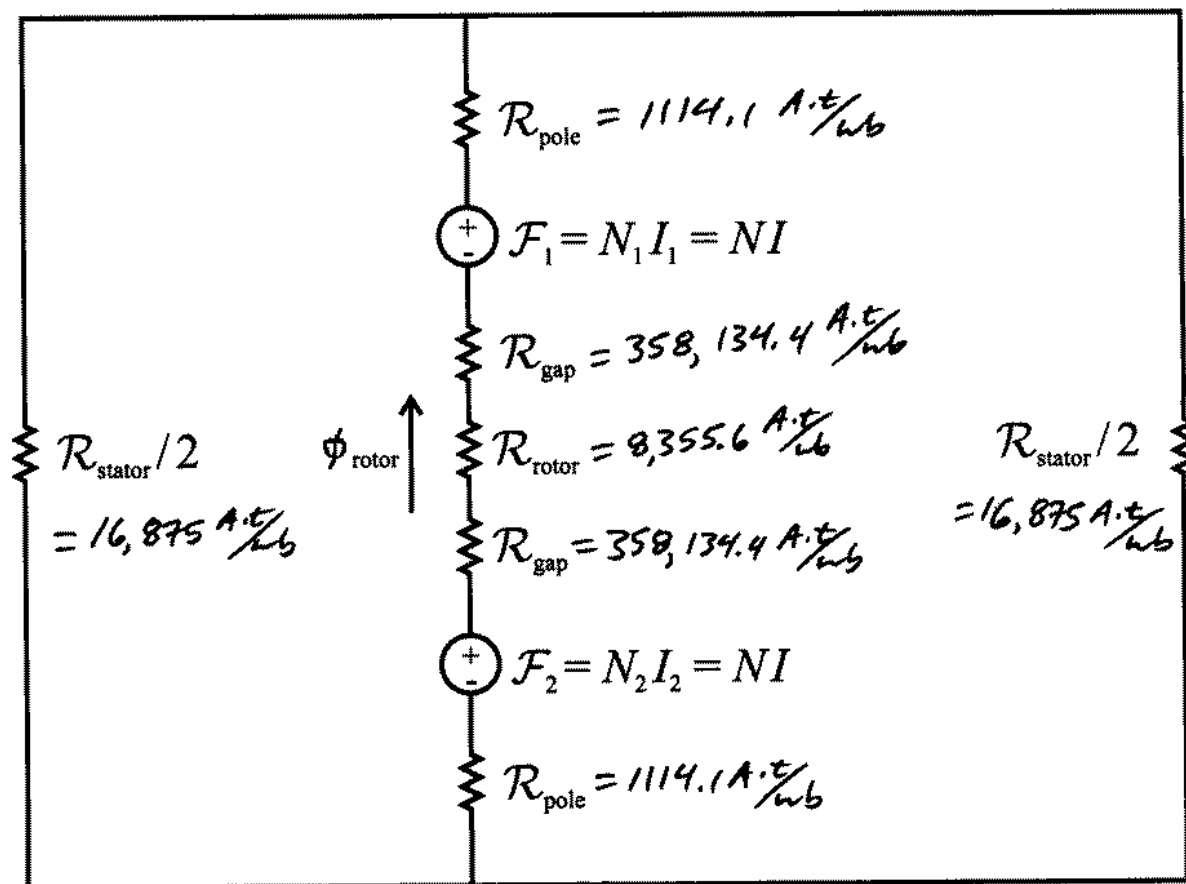

↓ Simplify

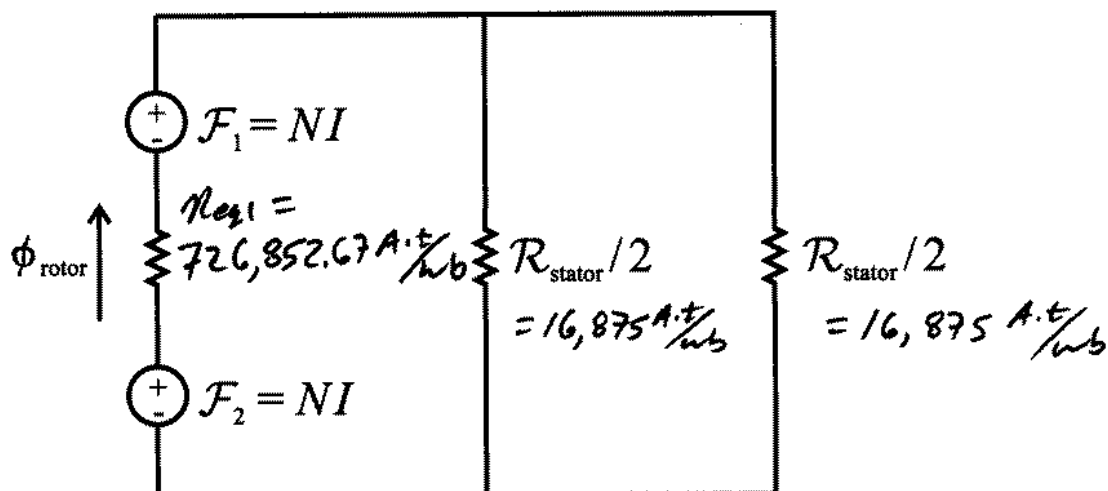

ex. cont.

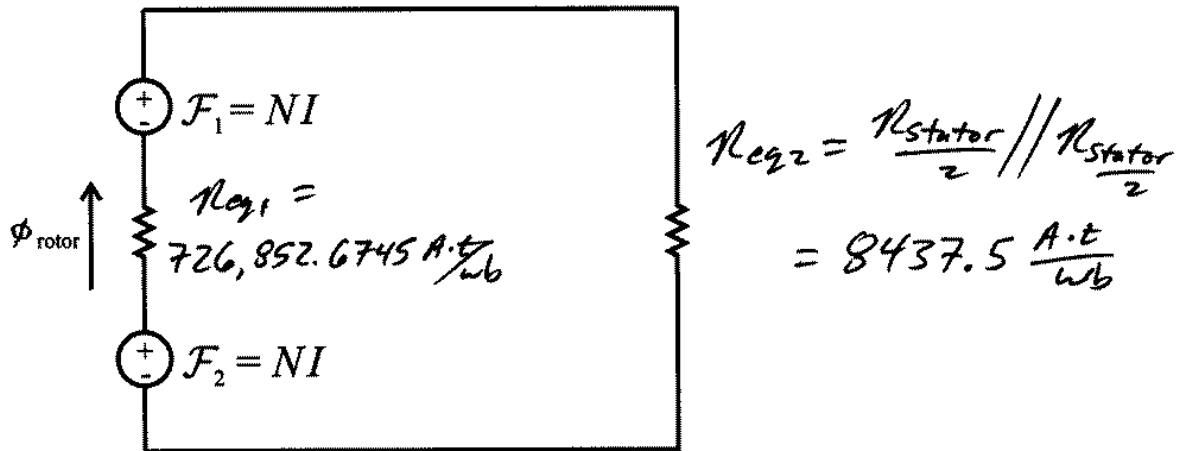

Apply KVL (go in CW direction)

$$-NI + \Phi_{rotor}(726,852.6745) - NI + \Phi_{rotor}(8437.5) = 0$$

→ substitute $\Phi_{rotor} = 5 \times 10^{-3} \text{ Wb}$ into eqn
to get

$$\begin{aligned} 2NI &= \frac{(5 \times 10^{-3}) [726,852.6745 + 8437.5]}{2} \\ &= 1838.225 \text{ A.t} \end{aligned}$$

Choose $I = 12 \text{ A}$, then the number of turns is

$$N = \frac{1838.225}{12} = 153.185$$

Since N must be an integer, choose

$$\underline{N = 154} \quad \text{and} \quad \underline{I = 11.9365 \text{ A}} = \frac{1838.225}{154}$$