

Design a six-element Yagi-Uda antenna for VHF television channel 10 using a copper-pipe boom with an outer diameter of 7/8 inch and brass elements with an outer diameter of 3/8 inch. **Note:** Assume  $c = 2.998 \times 10^8$  m/s.

- a) Tabulate design specifications (assume  $50 \Omega$  feeding transmission line)

**Six-element Channel 13 Yagi-Uda antenna Specifications**

Directivity/gain $D_{\max}$	10.2 dBd = <b>12.35 dBi</b>	
Frequency range	<b>192 - 198 MHz</b>	$f_c = 195$ MHz
Input impedance $R_0$	<b>50 <math>\Omega</math></b>	

- b) Show complete design procedure (e.g., design figures, spreadsheets, ...) in a fashion similar to example given in class.

**Design Steps:**

1. Select or specify design parameters:

- The directivity of a 6 element Yagi-Uda antenna, from Table 10.6, is 10.2 dBd =  $10.2 + 2.15 = \underline{\underline{12.35 \text{ dBi}}}$  Note: For a Yagi-Uda antenna, gain  $\approx$  directivity.
- Design Frequency- Channel 10 192-198 MHz , so  $f = \underline{\underline{195 \text{ MHz}}}$ .
- Desired input impedance-  $R_0 = \underline{\underline{50 \Omega}}$  (not required for design process, yet)

2. Select diameter  $d$  of elements and diameter  $D$  of metallic supporting boom

Element diameter-  $d = \underline{\underline{3/8'' = 0.9525 \text{ cm}}}$  (use brass pipe)

Boom diameter-  $D = \underline{\underline{7/8'' = 2.2225 \text{ cm}}}$  (use 3/4'' I.D. copper pipe)

3. Calculate design wavelength  $\lambda$ . Use  $\lambda$  to calculate  $s_{12}$  (reflector-driven element spacing) &  $s_{ij}$  [driven-director & director-director spacing(s)] using Table 10.6 (next page) values.

$$\lambda = \frac{c}{f} = \frac{2.998 \times 10^8}{195 \times 10^6} = 1.5374359 \text{ m} \Rightarrow \underline{\underline{\lambda = 153.7436 \text{ cm}}}$$

$$\underline{\underline{s_{12} = 0.2\lambda = 30.7487 \text{ cm}}}$$

$$\underline{\underline{s_{ij} = 0.25\lambda = 38.4359 \text{ cm}}}$$

4. Calculate  $d/\lambda$ . Is  $0.001 \leq d/\lambda \leq 0.04$ ?

$$d/\lambda = 0.9525/153.7436 = \underline{\underline{0.00619538}} \Rightarrow \text{Within } 0.001 \leq d/\lambda \leq 0.04 \text{ range.}$$

5. If a metal boom is used, calculate  $D/\lambda$ . Is  $0.001 \leq D/\lambda \leq 0.04$ ?

$$D/\lambda = 2.2225/153.7436 = \underline{\underline{0.0144559}} \Rightarrow \text{Within } 0.001 \leq D/\lambda \leq 0.04 \text{ range.}$$

6. Since  $d/\lambda = 0.00619538 \neq 0.0085$ , the elements lengths must be corrected. Plot the lengths of the reflector (element 1) & first director (element 3) from Table 10.6 on design curves **B** on Figure 10.25. Label these points  $l_1''$  and  $l_3''$  respectively.

On Design curves B at  $d/\lambda = 0.0085$ , plot-  $l_1'' = 0.482\lambda$  &  $l_3'' = 0.428\lambda$

**Table 10.6** OPTIMIZED UNCOMPENSATED LENGTHS OF PARASITIC ELEMENTS FOR YAGI-UDA ANTENNAS OF SIX DIFFERENT LENGTHS


$d/\lambda = 0.0085$ $s_{12} = 0.2\lambda$		LENGTH OF YAGI-UDA (IN WAVELENGTHS)					
		0.4	0.8	<b>1.20</b>	2.2	3.2	4.2
LENGTH OF REFLECTOR ( $l_1/\lambda$ )		0.482	0.482	<b>0.482</b>	0.482	0.482	0.475
LENGTH OF DIRECTORS, $\lambda$	$l_3$	0.442	0.428	<b>0.428</b>	0.432	0.428	0.424
	$l_4$		0.424	<b>0.420</b>	0.415	0.420	0.424
	$l_5$		0.428	<b>0.420</b>	0.407	0.407	0.420
	$l_6$			<b>0.428</b>	0.398	0.398	0.407
	$l_7$				0.390	0.394	0.403
	$l_8$				0.390	0.390	0.398
	$l_9$				0.390	0.386	0.394
	$l_{10}$				0.390	0.386	0.390
	$l_{11}$				0.398	0.386	0.390
	$l_{12}$				0.407	0.386	0.390
	$l_{13}$					0.386	0.390
	$l_{14}$					0.386	0.390
	$l_{15}$					0.386	0.390
	$l_{16}$					0.386	
$l_{17}$					0.386		
SPACING BETWEEN DIRECTORS ( $s_{ij}/\lambda$ )		0.20	0.20	<b>0.25</b>	0.20	0.20	0.308
DIRECTIVITY RELATIVE TO HALF-WAVE DIPOLE (dB)		7.1	9.2	<b>10.2</b>	12.25	13.4	14.2
DESIGN CURVE (SEE FIGURE 10.25)		(A)	(B)	<b>(B)</b>	(C)	(B)	(D)

SOURCE: Peter P. Viezbicke, *Yagi Antenna Design*, NBS Technical Note 688, December 1976.

- Draw a vertical line from  $d/\lambda = 0.0062$  through reflector and director design curves **B**, and read the corrected lengths of the reflector  $l_1'$  and first director  $l_3'$ . The length  $l_3'$  should be used for any other directors that are the same original length as  $l_3$ .

Label and read the corrected (for element diameter) lengths-

$l_1' = 0.484\lambda$  &  $l_3' = l_6' = 0.436\lambda$

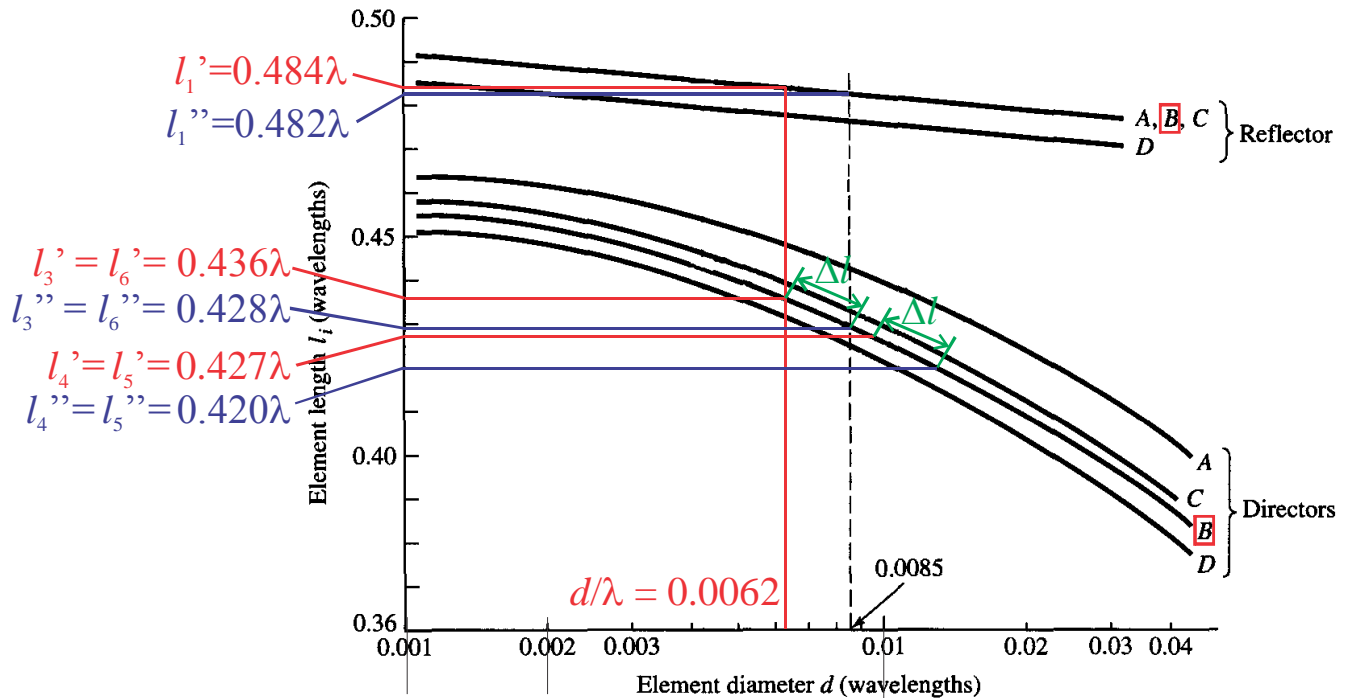

**Figure 10.25** Design curves to determine element lengths of Yagi-Uda arrays. (SOURCE: P. P. Vezbicke, “Yagi Antenna Design,” NBS Technical Note 688, U.S. Department of Commerce/National Bureau of Standards, December 1976)

- Measure and label the arc length  $\Delta l$  between  $l_3''$  and  $l_3'$  along the design curve.

Using ruler,  $\Delta l = 0.5685 \text{ cm}$ .

- Plot the remaining original optimized director lengths from Table 10.6 on the appropriate director design curve on Figure 10.25 and label  $l_i''$

On director design curve **B**, plot length of the second & third directors-

$l_4'' = l_5'' = 0.420\lambda$

- To find the corrected (for element diameter) length(s) for the remaining directors, move  $\Delta l$  from  $l_i''$  (same direction as between  $l_3''$  and  $l_3'$ ) to the corrected length  $l_i'$ .

Move  $\Delta l = 0.5685 \text{ cm}$  from  $l_4'' = l_5'' = 0.420\lambda$ , and read-  $l_4' = l_5' = 0.427\lambda$


11. The element lengths must be lengthened to compensate for a metal boom. On Figure 10.26, draw a vertical line from  $D/\lambda = 0.014456$  through the curve. Read the compensation length.

From Figure 10.26 (below), read- **compensation length =  $0.0099\lambda$**

$$l_1 = l_1' + 0.0099\lambda = 0.484\lambda + 0.0099\lambda = 0.4939\lambda \Rightarrow \underline{l_1 = 75.934 \text{ cm}}$$

$$l_3 = l_6 = l_3' + 0.0099\lambda = 0.436\lambda + 0.0099\lambda = 0.4459\lambda \Rightarrow \underline{l_3 = l_6 = 68.554 \text{ cm}}$$

$$l_4 = l_5 = l_4' + 0.0099\lambda = 0.427\lambda + 0.0099\lambda = 0.4369\lambda \Rightarrow \underline{l_4 = l_5 = 67.171 \text{ cm}}$$

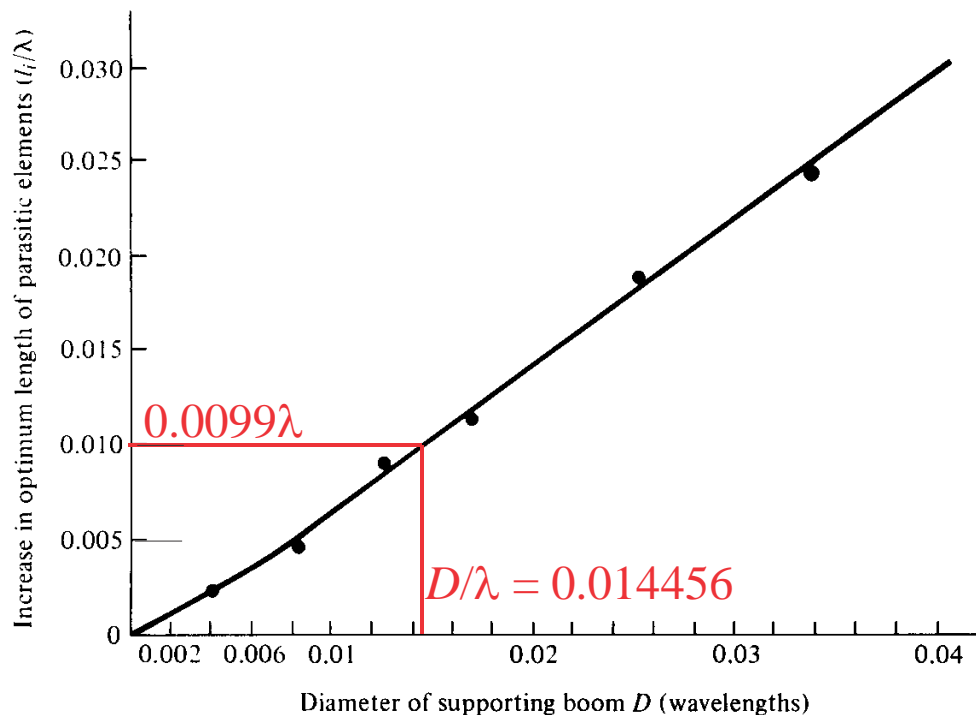

**Figure 10.26** Increase in optimum length of parasitic elements as a function of metal boom diameter. (SOURCE: P. P. Viezbicke, "Yagi Antenna Design," NBS Technical Note 688, U.S. Department of Commerce/National Bureau of Standards, December 1976)

12. Design matching network (e.g., Gamma match, ...) to connect the antenna to the selected transmission line. The length of the driven element is empirically adjusted to achieve a match at the design frequency. Typically, it has a length between that of the reflector and the first director.

$$l_3 = 68.554 \text{ cm} < l_2 < l_1 = 75.934 \text{ cm}$$

- c) Make a **scale** drawing of the final Yagi-Uda antenna design including boom (transmission line may be omitted) that a machinist could take and use to build the antenna (use centimeters for all dimensions). Assume boom will need to extend 26" past the reflector to allow antenna to be attached to an antenna mast, and 2" past the last director for mechanical strength.

### 6 element, channel 10 Yagi-Uda antenna w/ boom

